



WPKA

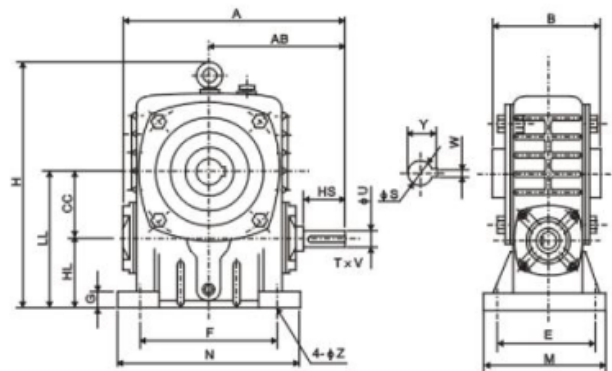

SHAFT DIRECTION



size	ratio	A	AB	B	CC	E	F	G	H	HL	LL	M	N	Z	Input shaft			output shaft		(kg)
															HS	U	T x V	S	W x Y	
40	1/10	143	87	90	40	70	80	13	138	40	80	90	100	10	25	12	4x2.5	16	5x18.3	4
50		175	107	100	50	95	110	15	173	50	100	120	140	12	30	12	4x2.5	20	6x22.8	7
60	1/15	196	122	110	60	105	120	20	204	60	120	130	150	12	40	15	5x3	25	8x28.3	10.5
70		231	140	126	70	115	150	20	236	70	140	150	190	15	40	18	6x3.5	30	8x33.3	14.5
80	1/20	261	160	136	80	135	180	20	268	80	160	170	220	15	50	22	6x3.5	35	10x38.3	22
100		322	190	160	100	155	220	25	329	100	200	190	270	15	50	25	8x4	40	12x43.3	36
120	1/30	381	229	180	120	180	260	30	430	120	240	230	320	18	65	30	8x4	45	14x48.8	63
135		433	260	204	135	200	290	30	480	135	270	250	350	18	75	35	10x5	60	18x64.4	80
155	1/50	504	302	250	155	220	320	35	431	135	290	275	390	21	85	40	12x5	70	20x74.9	114
175		546	325	280	175	250	350	40	600	160	335	310	430	21	85	45	14x5.5	80	22x85.4	150
200	1/60	587	350	324	200	290	390	40	667	175	375	360	480	24	95	50	14x5.5	85	22x90.4	218
250		705	420	380	250	380	480	45	800	200	450	460	560	28	110	60	18x7	110	28x116.4	360